



# Playhouse

## Lag Screw / Carraige Bolt Installation

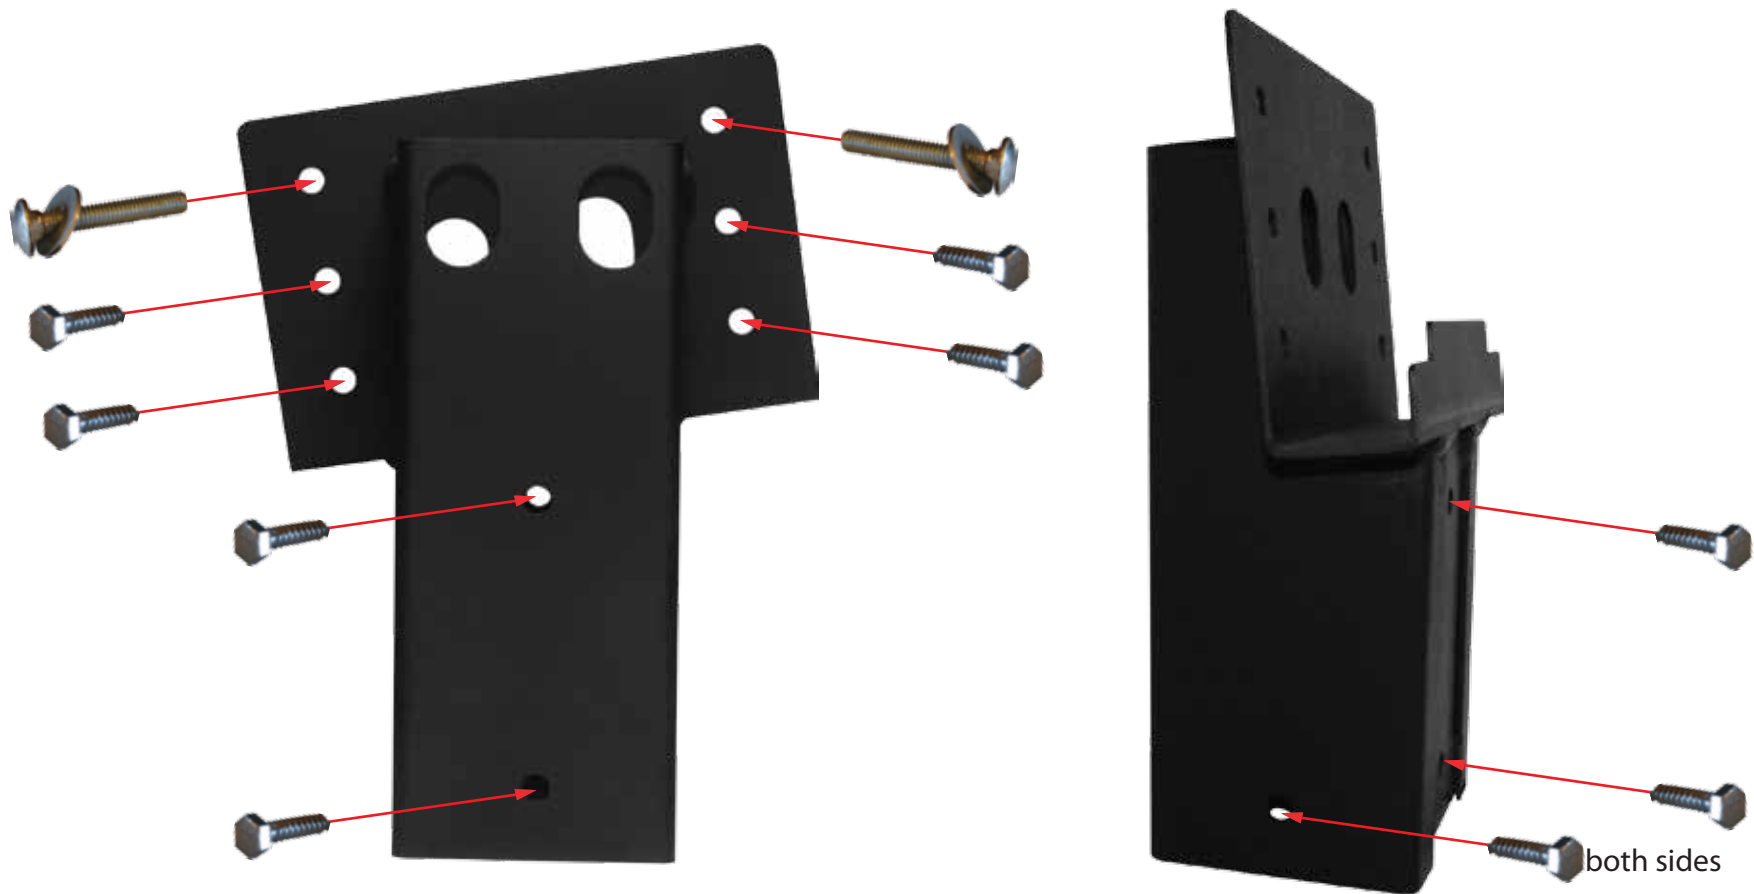

# Playhouse

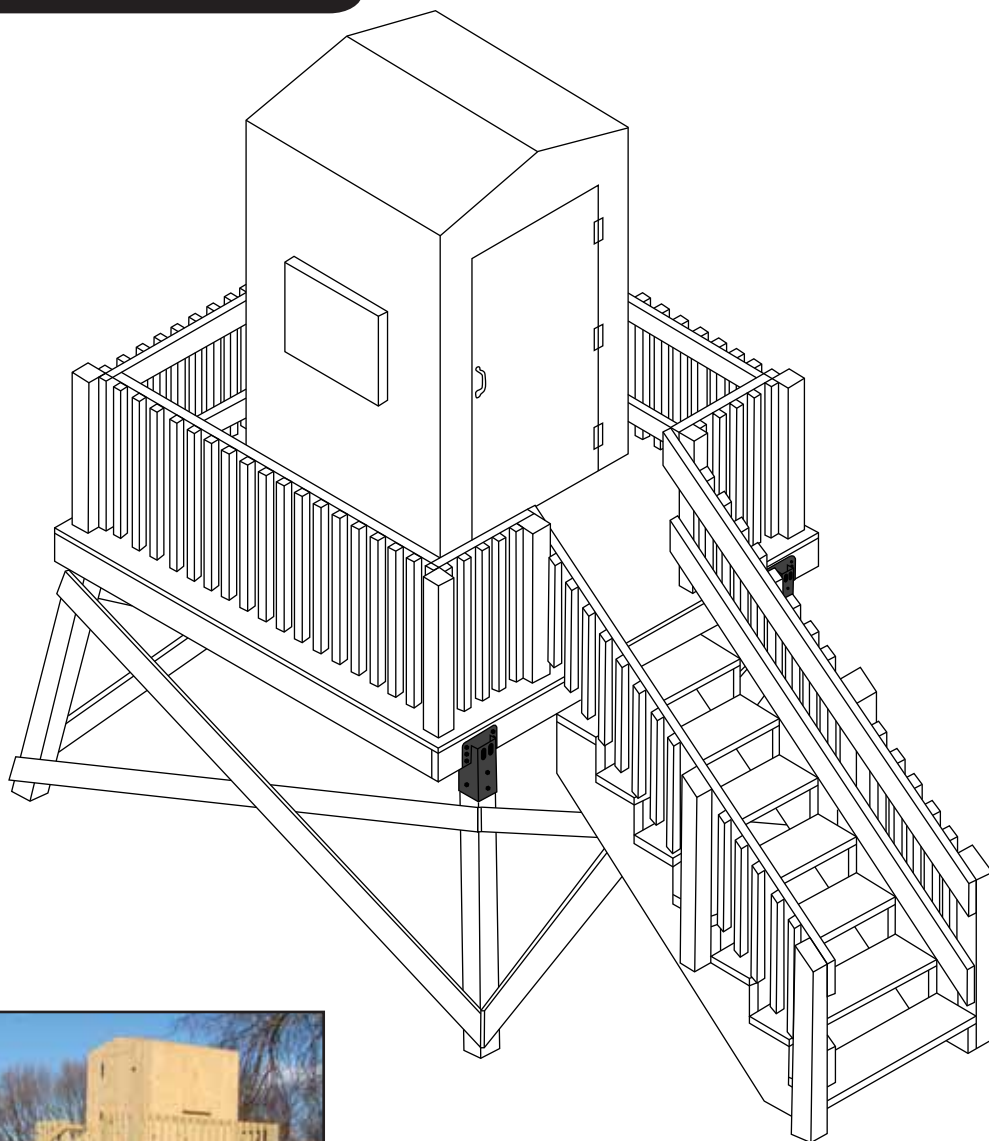

4x4 (E188) Double 8 Elevators, set of 4.



## 8x8 Platform

### All Treated Construction

- 7 - 2x6's cut to 93"
- 2 - 2x6's at 96" (8')
- 17 - 5 1/4" deck boards at 96"

## Stairs

### All Treated Construction

- 9 - 2x12's cut to 36" for stair treads
- 2 - 2x12's at 144" (12') for stringers
  - 7 1/8" x 10" stair cuts for 11 1/4" treads
- 1 - 2x12's cut to 36" then ripped to 9" for the stair hanger board
- 2 - 2x6's cut to 15" for backers for the stair hanger board

## Hand Rails

### All Treated Construction

- 10 - 4x4's cut to 40" for corners and stairs
- 4 - 2x4's at 120" for hand rails on stairs
- 4 - 2x4's cut to 21" for platform rails\*
- 6 - 2x4's cut to 85 3/4" for platform rails\*
- \* cut platform rails to fit, sizing may need to vary slightly
- 83 - 2x2's cut to 30" for spindles

## Legs

### All Treated Construction

- 4 - 4x4 posts cut to 66"
- 8 - 5 1/4" x 10' boards for crossbracing. Cut after installation.

## Hardware

- 40 - 1 1/2" x 5/16" lag bolts for Elevator installation
- 8 - 3" carriage bolts and nuts
- 28 - 3" x 5/16" lag bolts for the 4x4 hand rail posts
- 76 - flat 5/16" washers
- 10 - 2x6 joist hangers and screws
- 5lbs 3" deck screws
- 5 lbs 2 1/2" deck screws