




UNIVERSAL GUN WINDOW


Installation Instructions

Silent Shadow Window System


Tools Needed: Cordless Drill • Square Drive Bit • Tape Measure • Saw




Interior Shield Track



Exterior Shield Track



Exterior Drip Cap

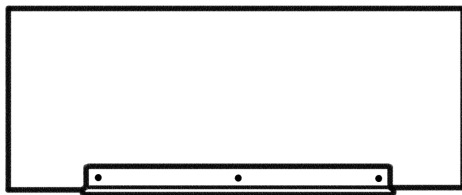


Interior Glass Panel



Speed Cinch®

Screws & hardware included for two window system:

- [16] #8 x 1" Washer Head Screws
Use 3 screws per interior glass hinge.
- [32] #8 x 3/4" Pan Head Screws
Use 3 screws per exterior track.
Use 5 screws per drip cap, evenly spaced.
- [2] Rubber Window Shield Stops
- [2] Interior Glass Panel
- [2] Window Shield with Draw Cord
- [2] Drip Cap
- [4] Exterior Shield Tracks
- [4] Interior Shield Tracks
- [2] Speed Cinch®

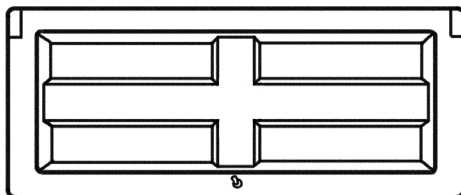

Exterior Window Shield with Draw Cord




STEP 1. PREPARING YOUR BLIND

Mark the intended position of your window using the measurements indicated here.


You can opt to center a single blind opening on your wall, or you can place two windows side by side. If installing two windows, position them about 6 inches apart.

Cut the window frame.

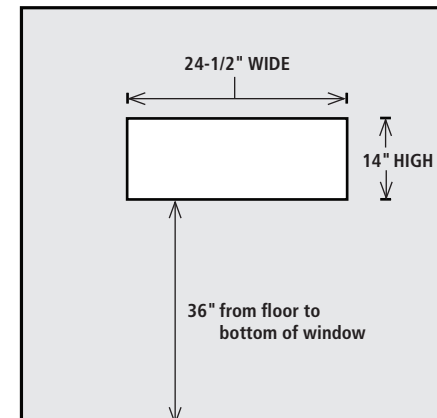


STEP 2. INSTALL THE EXTERIOR SHIELD TRACKS

2A - On each of the 14" sides, measure over 1-3/4" and 7" down from the top of the window opening. Be sure to mark all four spots.

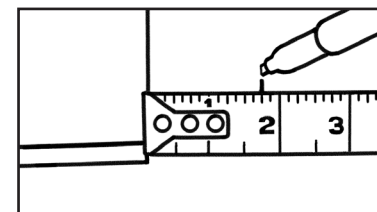


2B - Using the marks as a guide, position the first exterior shield track along one side of the window opening. Raise the channel about 1/8" above the top of the window. Use 1 pan head screw to hold the exterior track in place.

Repeat step 2B on the opposite side.

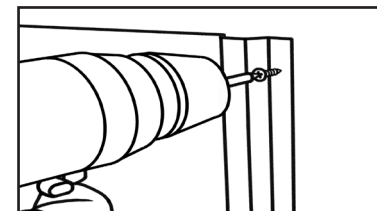


2C - Make sure each track is aligned at the top and bottom of the window opening. Use a total of 3 pan head screws to fasten each track in place.

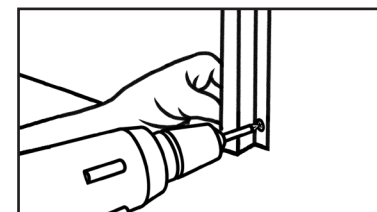

STEP 3. INSTALL THE EXTERIOR SHIELD

Drop the exterior shield into place behind the exterior shield tracks. The cord hole should be on the bottom of the shield.


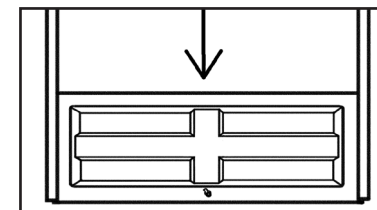


(Gun window instructions continue on the other side)

STEP 4. INSTALL THE EXTERIOR DRIP CAP


4A - It is critical to place the Drip Cap on top of the Shield Track as seen in the image.

Begin by making guide marks 1-9/16" above the window.

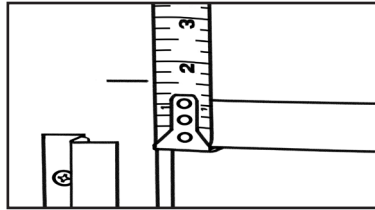

4B - Secure the drip cap on the right side with 1 pan head screw. Then, make sure the drip cap is level and rests on the marks. If so, secure with another pan head screw.


Use 5 evenly spaced pan head screws to finish securing the Drip Cap.

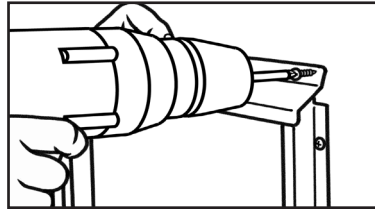


STEP 5. INSTALL THE INTERIOR DRAW CORD LOCK

5A - Pull the shield up and down a few times to center the cord in the window.


Once you've found the center, let the shield down. Then measure 15 1/2" down from the center and mark the position.

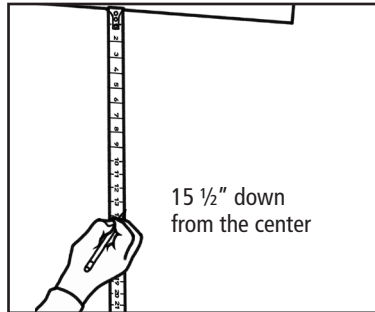

5B - Position the bracket over the mark, and place the tube in a vertical position. The notch should be at the bottom. Secure the Speed Cinch® with two #8 x 1" screws. Run cord through the tube.

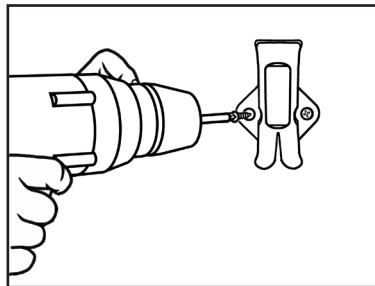


5C - Run the cord through the speed cinch tube. Then thread the cord through the rubber shield stop. Now tie a knot at the end of the cord. You may need to adjust the knot to make sure the shield is at or just below the window.

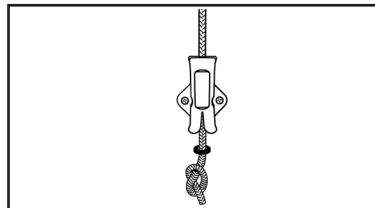


STEP 6. INSTALL THE INTERIOR GLASS AND TRACK

6A - Slide the plastic glass tracks onto each side of glass panel.

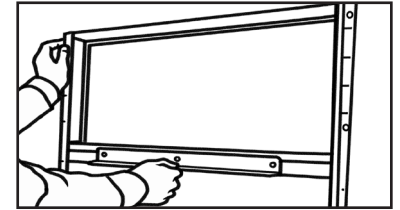


6B - Hold the glass and tracks over the window opening, making sure it is even on both sides. Hold top of glass about 3/4" above the top of the window opening.

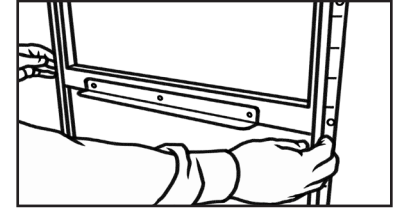

6C - Using washer head screws, secure one track on the right side of the window (top and bottom). On the left side of the window, place 1 washer head screw in the top hole of the opposite track.

Lower the glass to make sure it is level and will slide smoothly.

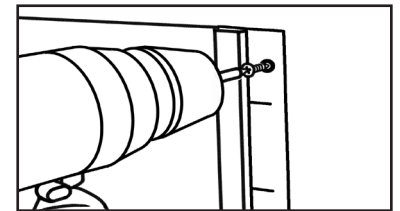

Gun Window - Silent Shadow Window System

SUMMIT OUTDOORS, LLC

7201 Engle Rd., Fort Wayne, IN 46804 • Toll Free: 1-888-446-4868 Fax: 260-483-2070

www.shadowhunterblinds.com